



9500LDS

Etched 2D Reading Portable Terminal



9500LDS-M3

Description

The 9500LDS is a portable terminal, designed as a joint effort between engineering groups at InData Systems and HHP – a leader in imaging technologies, for reading and decoding small-scale etched or embossed two dimensional (2D) Matrix symbologies. The InData Systems Patented LDS-V2 (Light Delivery System) aims the light from the scanner to the precise area the light is needed and at an angle at which specular reflection is reduced considerably. This provides an optimal contrast ratio on etched and embossed symbologies and relates to achieving quicker, more successful bar code decoding. The Patent Pending 9500LDS-M3 is designed to take etched marks on shiny or curved surfaces and use the shininess to make a virtual white background with a black bar code.

Designed to optimally read and decode exceptionally small Datamatrix bar codes (the code selected as the ATA Spec2000² and EIA¹ standard for small parts marking), the 9500LDS is the terminal of choice for a wide range of applications. Because it is both difficult and costly to place a label on small electrical, medical instruments or aircraft components, the small Datamatrix codes are many times applied directly to the surface of the part itself by laser etching, chemical etching or use of the ink jet applied paints. This many times leads to low contrast ratios, and bar codes on irregular surfaces. Both of these factors lead to bar codes that are not easily decoded. The 9500LDS optimizes the readability by concentrating the lighting on the target bar code at a sharp angle and magnifying the codes. The angle at which the light hits the object minimizes the “wash out” effect caused by irregular and shiny surfaces.

Lightweight, balanced and easy to use, the 9500LDS can be used in repetitive, high volume hand scanning operations in even the most demanding environments. The 9500LDS is a Microsoft Pocket PC based device and can be programmed for a wide variety of applications. The 9500LDS can transfer its data easily to all popular PC. The 9500LDS can be integrated with all types of customer systems. Our optics are available on tethered imaging scanners such as the HHP4600 as well.



Features

2D Image Reader

Supports All Popular 1D & 2D Symbologies

Portable Terminal

Omni-Directional 1D & 2D Scanning

Intuitive scanning

Benefits

Handheld portable terminal for reading and decoding etched 2D symbologies.

9500LDS supports all DataMatrix, QR Code, Aztec and Micro-PDF417 barcodes. It is specially designed to read ultra small etched or embossed matrix bar codes and OCR fonts. Additional symbologies may be added as emerging codes are approved by AIM.

Opens up new 2D bar code and image capture possibilities in portable applications.

The imaging technology basis for the 9500LDS means it can offer omni-directional scanning which greatly simplifying operator training and increasing productivity.

The 9500LDS is a near contact scanner. Its aiming guide or tips of the optics help the user to immediately reason how to line up the bar code with the scanner between the two light pipes or guides.



9500LDS-V2



¹ The Electronics Industry Association (EIA) is an industry trade association of key US electronics manufacturers (for example, Intel, Motorola, Texas Instruments)
² The Air Transport Association (ATA) is an industry trade association of many of the aircraft manufacturers setting standards for their industry – one being SPEC2000.

27 Fennell Street • Skaneateles, NY 13152
Phone: (315) 685-8311 • Fax (315) 685-8312
Internet: www.indatasys.com

9500LDS Technical Specifications

Specifications

Performance:

| | |
|--------------------------------|--|
| Focal Point: | Contact - .2 inches from end of Light Pipe |
| Working Range: | Barcodes with a minimum 4.75 mil (.1mm) narrow element |
| Rotational Sensitivity: | 360° |
| Field of view: | 0.35 inches/ 0.9 cm |
| Ambient Light: | Total darkness to 1,000 lux |
| Aiming: | Contact, between light pipes |

Symbologies:

| | |
|-------------------|--|
| Matrix: | DataMatrix (ECC 000, 050, 080,100,140, 200), QR Code, Micro-PDF417 and Aztec |
| Linear: | Code 39, Code 128, I 2 of 5, Codabar, and most other very small 1D codes. |
| OCR Fonts: | OCR-A, OCR-B, OCR-Semi |

Interfaces and Options:

| | |
|-----------------------------------|--|
| Base and cable Interfaces: | Charging USB and Serial RS-232 – Future Ethernet interface |
| Options: | Interchangeable Optics, Wireless 802.11b, Bluetooth interface, Image Capture |


Mechanical/Electrical:

| | |
|----------------------------|---|
| Dimensions: | |
| Length: | 11.5 in. (292.1 cm) |
| Height: | 1.66 in (35.6) [with support legs = 2.8 in. (71.1 cm)] |
| Width: | 3.45 in. (87.6 cm) |
| Weight: | 24 oz. (680 g) |
| Power Requirements: | 7.4V, 14.8 Watt removable, rechargeable lithium-ion battery |



Environmental:

| | |
|----------------------------------|---|
| Temperature - | |
| Operating: | -10 ⁰ C to 50 ⁰ C |
| Storage: | -20 ⁰ C to +70 ⁰ C |
| Humidity: | 95% RH, non-condensing at 50 ⁰ C |
| ESD: | Functional after 15KV discharge |
| Environmental Resistance: | IP64 for moisture and particle resistance |
| Agency: | FCC Class B, CE |

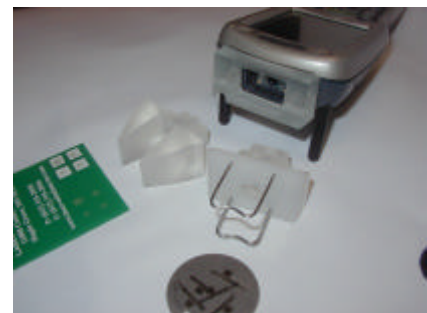

9500LDS-interchangeable

Due to InData Systems continuing product improvement programs, specifications and features herein are subject to change without notice



27 Fennell Street • Skaneateles, NY 13152
Phone: (315) 685-8311 • Fax (315) 685-8312
Internet: www.indatasys.com